



- Gotero protegido
- Flujo turbulento
- Laberinto continuo de sección amplia
- Alta turbulencia garantizada
- Filtro de entrada

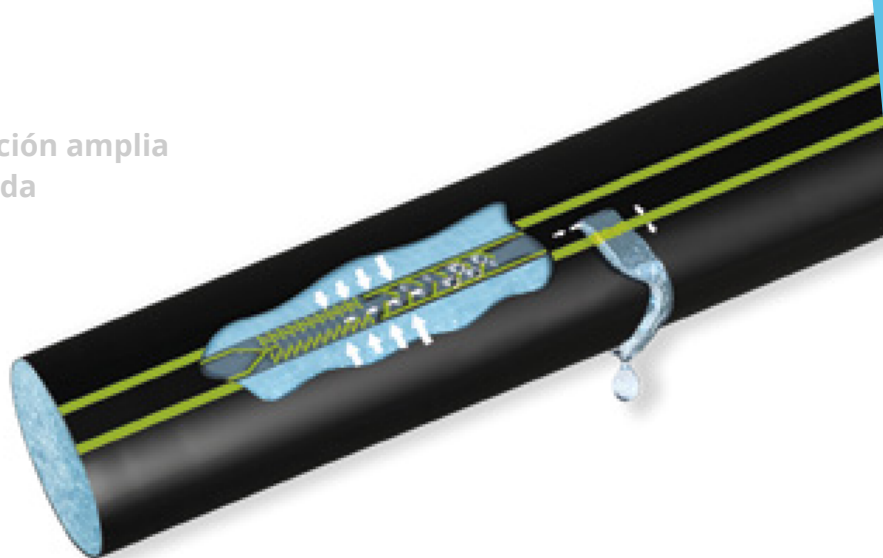

			Ø 16 mm		Ø 22 mm	
			*m		*m	
I/h	cm	I/h-m	* 90%	85%	* 90%	85%
0,6	15	4,0	165	180	252	298
	20	3,0	210	260	380	475
	30	2,0	270	340	490	610
	40	1,5	320	400	600	700
1,0	10	10,0	100	120	-	-
	15	6,6	120	140	190	228
	20	5,0	150	185	285	330
	30	3,3	190	240	365	400
	40	2,5	225	280	450	550
1,5	10	15,0	80	95	-	-
	15	10,0	88	105	167	200
	20	7,5	110	140	210	250
	30	5,0	140	170	280	300
	40	3,8	-	-	340	410
2,0	10	20,0	60	70	-	-
	20	10,0	85	105	-	-

* E.U. – uniformità di emissione / emission uniformity
 uniformité d'émission / uniformidad de emisión / равномерность расхода
 *m – lunghezza d'ala / max. lateral length / longueur / longitud / длина ряда

DIÁMETRO	mil	mm	bar	bar max.	m	kg	ROLLOS X PALET
16	5	0,125	0,6	0,7	3500	30,0	16-28-32
16	6	0,150	0,7	0,8	3000	29,5	16-28-32
16	7	0,175	0,7	0,9	2500	26,5	16-28-32
16	8	0,200	0,7	1,0	2200	27,0	16-28-32
16	10	0,250	0,7	1,1	1800	25,0	16-28-32
16	12	0,300	0,7	1,3	1500	24,0	16-28-32
16	15	0,380	0,7	1,5	1200	23,0	16-28-32
22	6	0,150	0,6	0,7	2200	28,0	16-28-32
22	7	0,175	0,7	0,8	2000	27,0	16-28-32
22	8	0,200	0,7	0,9	1700	27,0	16-28-32
22	10	0,250	0,7	1,0	1300	26,0	16-28-32
22	12	0,300	0,7	1,1	1000	24,0	16-28-32

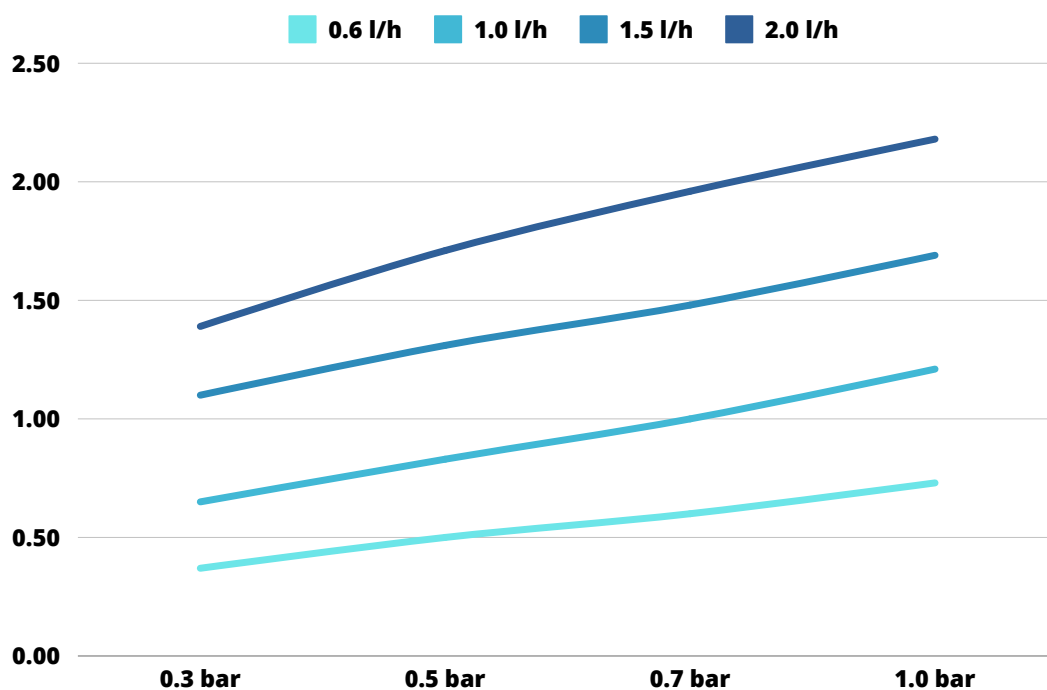

CAUDAL NOMINAL VS PRESIÓN	0,3	0,5	0,7	1,0
0,6	0,37	0,50	0,60	0,73
1,0	0,65	0,83	1,00	1,21
1,5	1,10	1,31	1,48	1,69
2,0	1,39	1,71	1,96	2,18